
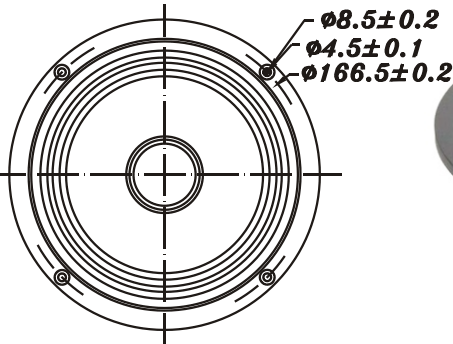



F SERIES

W6-1530S

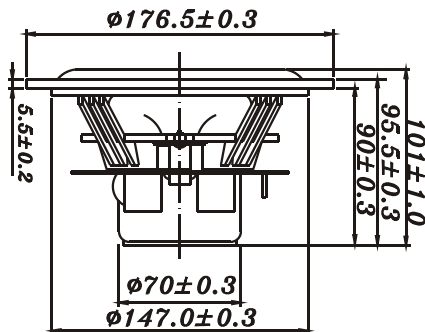

- WOOFER: SPECIAL FABRIC CONE WITH WILD RANGE TEMP, HIGHER LOSS RECIPE OF RUBBER SURROUND
- TWEETER: 25MM SILK DOME, SHORT RING TREATED, LOW 2nd,3rd DISTORTION
- ALUMINIUM DIE CAST BASKET
- NEODYMIUM MOTOR STRUCTURE
- MAGNETICALLY SHIELDED
- COAXIAL SPEAKER DESIGN

6.5" COAXIAL FULL RANGE

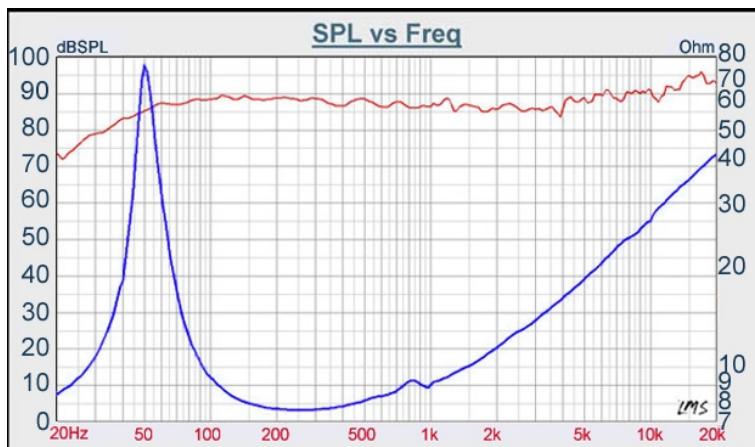

| | |
|-----------------------|-----------------------|
| DIAPHRAGM MTL | Fabric |
| SURROUND MTL | Rubber |
| NOMINAL IMPEDANCE | 8 Ω |
| DCR IMPEDANCE | 6.4 Ω |
| SENSITIVITY 1W/1m | 87 dB |
| FREQUENCY RESPONSE | 50Hz -20K Hz |
| FREE AIR RESONANCE | 50 Hz |
| VOICE COIL DIAMETER | 38.5 mm |
| AIR GAP HEIGHT | 6 mm |
| NOMINAL POWER | 45 W |
| MUSIC POWER | 90 W |
| FORCE FACTOR, BL | 6.45 T M |
| MAGNET WEIGHT (oz) | Neodymium |
| MOVING MASS | 13.8 g |
| FERROFLUID ENHANCED | No |
| SUSPENSION COMPLIANCE | 753 MN ⁻¹ |
| EFFECTIVE PISTON AREA | 0.0014 m ² |
| Levc | 0.15 mH |
| Zo | 78 ohm |
| X-max | 3.5 mm |
| Vas | 20.97 Litr |
| Qts | 0.60 |
| Qms | 7.21 |
| Qes | 0.66 |



VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com