
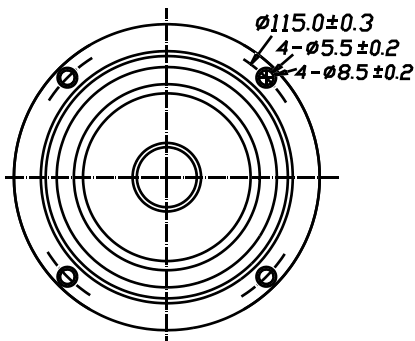


F


SERIES

W4-655SA

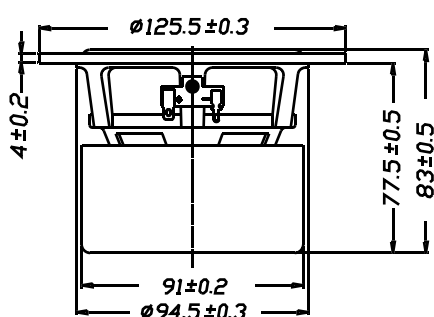

- FULL RANGE DESIGN
- HOME HI-FI, HOME THEATER, MID BASS APPLICATION
- DIE CAST BASKET
- PAPER CONE WITH RUBBER SURROUND
- MAGNETICALLY SHIELDED
- CCAW WITH KAPTON BOBBIN
- ALUMINUM PHASE PLUG

4" PAPER CONE/ FULL RANGE, WOOFER

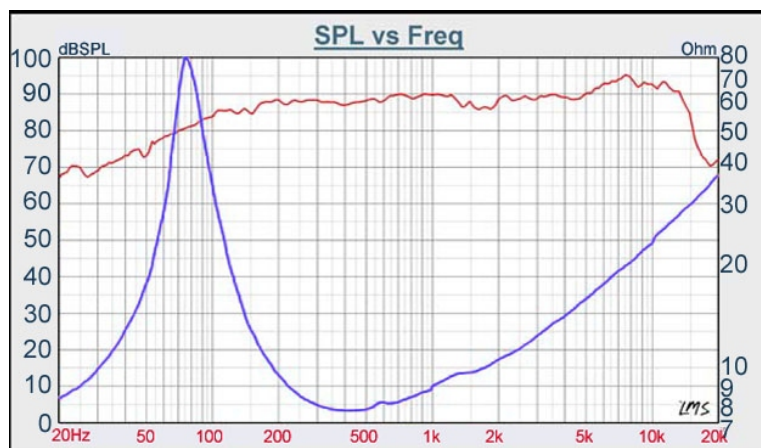

DIAPHRAGM MTL	Paper
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8
DCR IMPEDANCE	6
SENSITIVITY 1W/1m	89 dB
FREQUENCY RESPONSE	70 - 14kHz
FREE AIR RESONANCE	70 Hz
VOICE COIL DIAMETER	25 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	40 W
MAXIMUM POWER INPUT	80 W
FORCE FACTOR, BL	5.73TM
MAGNET WEIGHT (11 oz)	305 g
MOVING MASS	4 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	1104 MN ⁻¹
EFFECTIVE PISTON AREA	0.0057 M ²
Levc	0.4295 mH
Zo	79.5971 ohm
X-max	3 mm
Vas	5.09 Litr.
Qts	0.33
Qms	4.35
Qes	0.35

TB SPEAKERS

VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com