
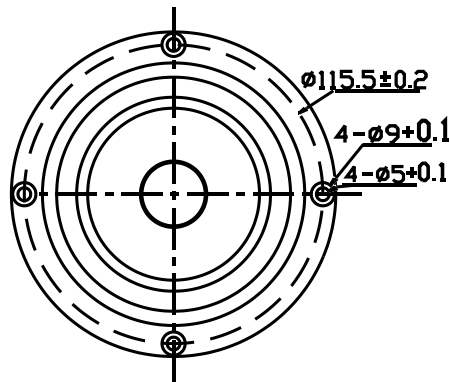


# F

## SERIES


# W4-657SC

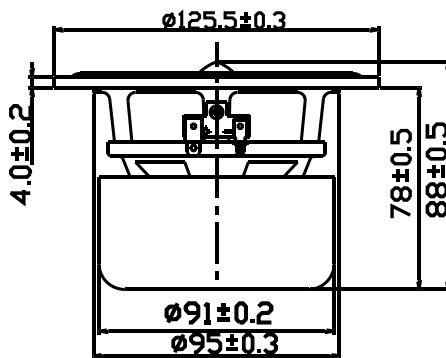

- FULL RANGE DESIGN
- HOME HI-FI, HOME THEATER, MID BASS APPLICATION
- DIE CAST BASKET
- ALUM / MG CONE WITH RUBBER SURROUND
- MAGNETICALLY SHIELDED
- CCAW WITH KAPTION BOBBIN
- ALUM. PHASE PLUG

### 4" ALUM CONE/ FULL RANGE, WOOFER

DIAPHRAGM MTL	Alum/Mg
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8
DCR IMPEDANCE	6
SENSITIVITY 1W/1m	88 dB
FREQUENCY RESPONSE	65 - 15kHz
FREE AIR RESONANCE	65 Hz
VOICE COIL DIAMETER	25 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	40 W
MAXIMUM POWER INPUT	80 W
FORCE FACTOR, BL	5.37 TM
MAGNET WEIGHT ( 11 oz)	305 g
MOVING MASS	4 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	1309 MN <sup>-1</sup>
EFFECTIVE PISTON AREA	0.0057 M <sup>2</sup>
Levc	0.4412 mH
Zo	83.0373 ohm
X-max	3.3 mm
Vas	6.04 Litr
Qts	0.36
Qms	5.01
Qes	0.39

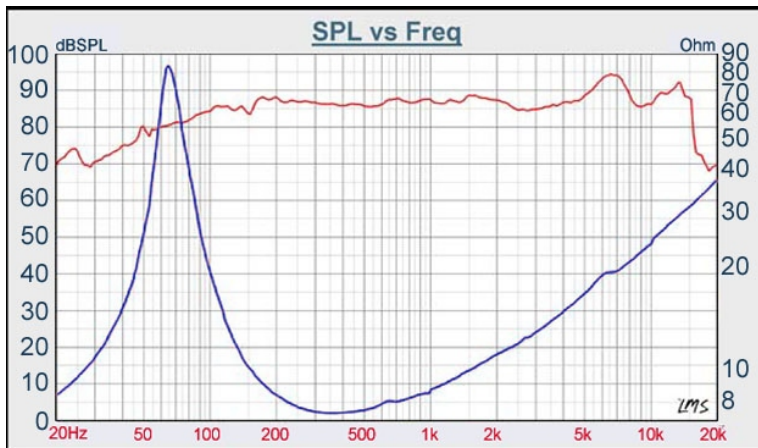

# TB SPEAKERS

VOICE: 886.2.26570282 FAX: 886.2.26580166  
E-MAIL: info@tb-speaker.com